

**TECHNICAL SPECIFICATIONS**

Material	Powder-coated aluminum
Thickness	12/10 mm
Coating	25-micron polyester lacquer, both sides
Resistance	High resistance to corrosion and UV rays
Finish	Integrated ALU-DROP® drip profile
ALU-DROP® Cover	Removable polymer, no tools required
Side caps	Right and left aluminum end caps
Profile width	Made to measure
Length	Made to measure
Standard colors	RAL 7016 · RAL 9006 · RAL 9005 · RAL 9003
Special color	Any RAL color, made to order
Certification	ISO 9001:2015

**INSTALLATION**

- 1 Cut the profile to the exact length of the window
- 2 Position the sill with the correct slope over the window ledge
- 3 Secure the profile to the ledge according to the support type
- 4 Fit the side caps onto the ends of the profile
- 5 Snap the ALU-DROP® cover onto the profile (optional)

The ALU-DROP® drip edge keeps water away from the façade, preventing stains and leaks. The cover installs and removes without tools.

**COMPONENTS**




**ALU-DROP® System (exploded view)**  
Aluminum profile + polymer ALU-DROP® cover + side caps



**Perfil ALU-DROP®**  
Profile with integrated drip edge, no cover



**Profile with ALU-DROP® Cover**  
Removable polymer cover over the profile

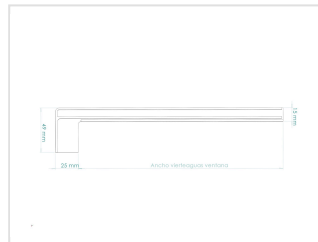


**Left side cap**  
Aluminum end cap for the left end



**Right side cap**  
Aluminum end cap for the right end

**DIMENSIONS**

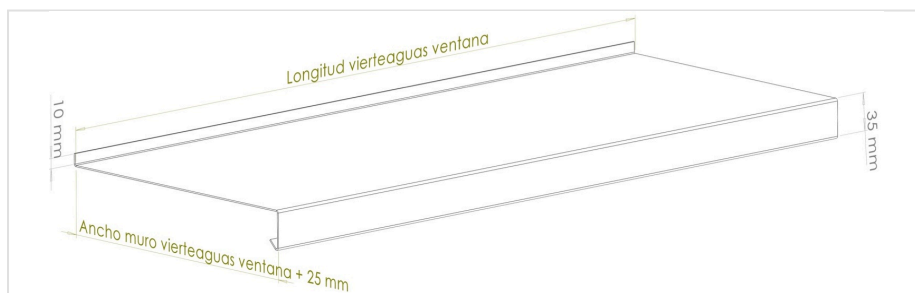

- Width:** Made to measure
- Length:** Made to measure
- Drip edge:** Integrated into the profile
- ALU-DROP® Cover:** Removable without tools
- Side caps:** Right and left

**COLORS AND FINISHES**

